

Modasa, company leading in the manufacture of generator sets, presents its product range.

Genset Description:

Model name	UQ125-RG
Engine	PERKINS 1204J-E44TTAG2 (EPA Tier 4F)
Alternator	STAMFORD UCI 274D
Controller	Electronic
Phases	Three-phase/ Single-phase
Voltage Selector	208V-480V/ 240V



Note: reference image, may vary depending on accessories

Genset Rating (≤ 3300 famsl):

Engine	Alternator	Power		Volt.	Phase	Freq.	PF	Max. Current.
		Prime power	Stand By Power					
1204J-E44TTAG2	UCI 274D	124 KVA / 99 KW	137 KVA / 110 KW	208V	3ph	60Hz	0.8	382 A
1204J-E44TTAG2	UCI 274D	125 KVA / 100 KW	139 KVA / 111 KW	480V	3ph	60Hz	0.8	167 A
1204J-E44TTAG2	UCI 274D	79 KVA / 79 KW	84 KVA / 84 KW	240V	1ph	60Hz	1.0	350 A

Power definitions:

Prime Power: Power available at variable load in lieu of a main power network. Overload of 10% is permitted for 1 hour in every 12 hours of operation.

Standby Power: Power available at variable load in the event of main power network failure. No overload is permitted.

The above ratings represent the engine performance capabilities to conditions specified in accordance with ISO 8528.

Codes & Standards:

The Generator set is designed and manufactured in a facility certified to ISO 9001 standards

Engine: ISO 3046, BS 5514 DIN 6271

Alternator: BS5000, VDE 0530, NEMA MG1-32, IEC34, CSAC22,2-100, ASI 1359

Genset: ISO 8528



General Specifications:

Engine:

Model	1204J-E44TTAG2
Cylinders	4 in line
Governor type	ECM
Cycle	4 Stroke
Aspiration	Twin Turbocharged
Fuel	Diesel
Combustion system	Direct injection
Cooling system	Water cooled
Bore	4.1 in
Stroke	5.0 in

System Voltage	12V
Frequency	60Hz
Exhaust gas temperature	986 °F
Displacement	268.5 in3
Compression ratio	16.5:1
Lubricating system capacity	1.85 gallons
Coolant system capacity	5.15 gallons

Fuel consumption (gallon per hour)

Speed Engine	1800 RPM
Stand by Power	8.2 gallon per hour
Prime Power	7.4 gallon per hour
75% Prime Power	5.6 gallon per hour

Aftertreatment system

Aftertreatment type	DOC/DPF/SCR
Aftertreatment configuration	Engine mounted
DEF tank capacity	7.4 gallon

Alternator:

Model	UCI 274D
Insulation system	Class "H"
Excitation system	Separately excited (PMG)
A.V.R voltage regulation	MX341 ± 1.0%
Protection	IP 23

Number of poles	04
Power factor	0.8
Frequency	60Hz
Winding number	Winding 311
Telephone interference	< 2%

Features Genset:

- ◇ Enclosure heavy duty steel, Residential silencer included
- ◇ Enclosure center lifting point, External fuel filling
- ◇ Standard sound attenuation foam, Oil & Coolant Drain Ports
- ◇ Direct flexible engine-alternator coupling
- ◇ Structural steel frame with rubber anti-vibration dampers
- ◇ 180 Gallon double wall sub base fuel tank
- ◇ Capacity for 30 hours of autonomy at 75% load prime
- ◇ ABB 400A 3 pole manual circuit breaker
- ◇ Voltage Selector Krauss & Naimer position (Y-YY-Z)
- ◇ Lockable lug box and Cam-Lock distribution panels
- ◇ Convenience receptacles with individual breakers
 - (2) 120V 20 Amp GFCI duplex outlets - (Nema 5-20R type)
 - (3) 125/250V 50 Amp, 3 pole, twist lock (Non-Nema 6369)
- ◇ 12V battery, connection cables, battery holder
- ◇ 12V/3A battery charger in control panel
- ◇ Battery disconnect switch, electric fuel level meter
- ◇ Emergency stop switch located on outside of enclosure
- ◇ Manuals and electrical diagrams in digital



Distribution panel (side)

Controller Data:

Equipped with the latest electronic digital control module DSE 7320, it allows the start, control, protection and stop of the generator set in manual and automatic modes. Makes automatic transfer.

Measurements

- ◇ Current of the three phases L1, L2, L3
- ◇ Voltage of the three phases L - L and L - N
- ◇ Energy demand KWh, KVAh, KVAh
- ◇ Active Energy KVAh
- ◇ Power factor
- ◇ Frequency
- ◇ Hours of operation
- ◇ Memory of the last 250 events, description, date and time
- ◇ Active Power KW
- ◇ Reactive Power KVA
- ◇ Oil pressure
- ◇ Coolant temperature
- ◇ Generator phase sequence.
- ◇ Turning speed
- ◇ Battery voltage

Protections

- ◇ Alarm for maintenance activated configured
- ◇ High engine temperature
- ◇ Low/High frequency
- ◇ Low oil pressure
- ◇ Low/High battery voltage
- ◇ Low/High generator voltage
- ◇ Boot failure
- ◇ Stop failure
- ◇ Negative phase sequence fault
- ◇ Over current fault
- ◇ Overload failure
- ◇ Emergency stop

Enclosed Genset Dimensions:



Noise Level
reference @ 23ft

Máximo
78 + 2 dBA

Ambient
50 dBA

Length 133.9 in

Width 45.3 in

Height 84.7 in

Weight 6610 lbs (dry)

Fuel tank 180 gallons (double wall)

Ø Esc. 2.5 in

Note: reference values, request more detail with dimensional drawing


Application images:



Connection Cam-Lock Standard



Control panel and breaker (rear side)

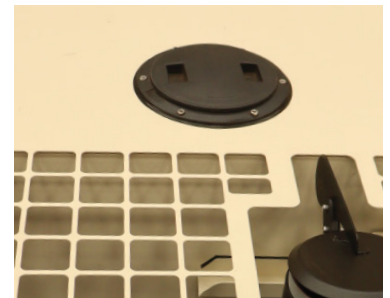

Lockable external fuel fill